


eme Gantry Crane Standard Models

Mobile & Portable: Lift Easily, Anywhere

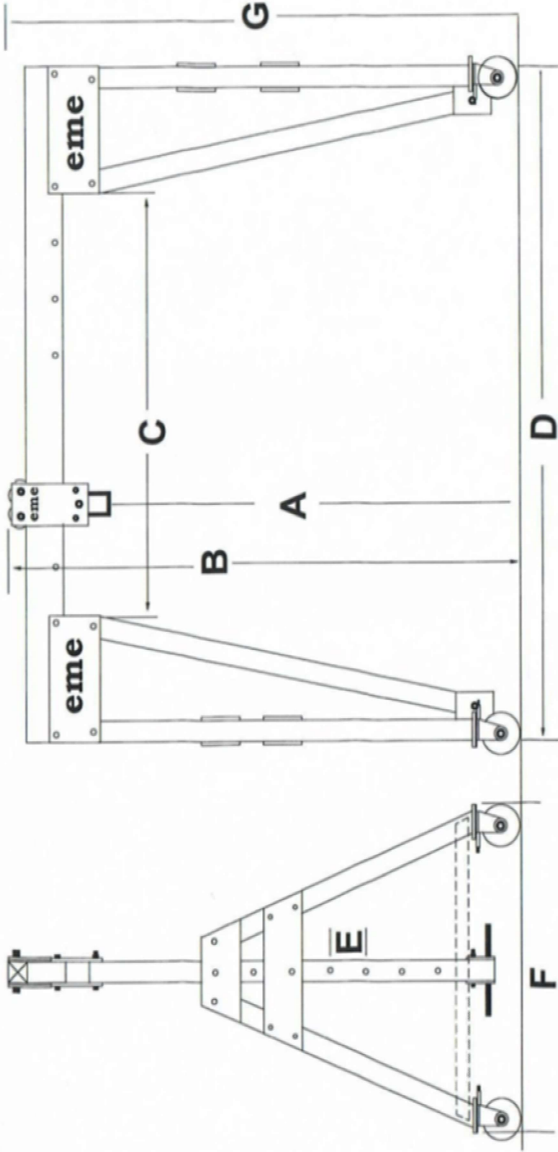

Standard Equipment on All Models

- All Aluminum Construction
- Locking 'Surround-Beam' Trolley
- 4 Position Swivel Locking Casters (roll & swivel)
- Proprietary Box Beam
- Grade L9 Chromate Plated Fasteners
- Height Adjustment Handles

Standard Documentation / Certification/ Safety

- Signed Certificate of Test (crane tested to Proof Load)
- Certified to Roll Loaded
- Engineers Stamped Drawing Provided with each Crane
- 10 Year Warranty on Crane, 2 Years on Casters
- CSA 47.2 Welding
- Mobile Application with Assembly Instructions



eme Pro Model	Lift Capacity	Standard Beam Length	Min/Max Height to Lifting Eye	Max Height to Top of Trolley	Clear Span	Wheel Base	Height		Caster Spread	Min Height to Top of Trolley	Assembled Weight	Prior to Shipment	
							Adj. Increment	Height				Cell Load	Tested of WLL
1100R-8	1,100 lbs	8 ft	66-90 in	106 in	5 ft.	93 in	6 in	48 in	82 in	235 lbs	125%	125%	
2200R-8	2,200 lbs	8 ft	66-90 in	106 in	5 ft.	93 in	6 in	48 in	82 in	235 lbs	125%	125%	
2200LW-10	2,200 lbs	10 ft	82-122 in	138 in	7 ft.	117 in	8 in	65 in	98 in	285 lbs	125%	125%	
2200XT-15	2,200 lbs	15 ft	120-176 in	191 in	12 ft.	117 in	8 in	85 in	135 in	400 lbs	125%	125%	
2200 Max-15	2,200 lbs	15 ft	164-252 in	268 in	12 ft.	177 in	8 in	124 in	190 in	435 lbs	125%	125%	
4400M-10	4,400 lbs	10 ft	66-90 in	106 in	7 ft.	117 in	6 in	48 in	82 in	275 lbs	125%	125%	
4400R-10	4,400 lbs	10 ft	82-122 in	138 in	7 ft.	117 in	8 in	65 in	98 in	335 lbs	125%	125%	
4400T-15	4,400 lbs	15 ft	98-138 in	154 in	12 ft.	177 in	8 in	65 in	114 in	365 lbs	125%	125%	
4400XT-15	4,400 lbs	15 ft	120-176 in	191 in	12 ft.	177 in	8 in	85 in	135 in	400 lbs	125%	125%	
4400HELI-15	4,400 lbs	15 ft	135-191 in	207 in	12 ft.	177 in	8 in	85 in	150 in	480 lbs	125%	125%	
4400MAX-15	4,400 lbs	15 ft	133-197 in	213 in	12 ft.	177 in	8 in	106 in	149 in	635 lbs	125%	125%	
6600R-15	6,600 lbs	15 ft	106-154 in	179 in	12 ft.	177 in	8 in	73 in	130 in	550 lbs	125%	125%	
6600MAX-15	6,600 lbs	15 ft	136-216 in	240 in	12 ft.	177 in	8 in	106 in	160 in	875 lbs	125%	125%	
8800MAX-15	8,800 lbs	15 ft	136-216 in	240 in	12 ft.	177 in	8 in	106 in	160 in	885 lbs	125%	125%	
11000R-15	11,000 lbs	15 ft	106-154 in	179 in	12 ft.	177 in	8 in	73 in	130 in	680 lbs	125%	125%	
16500R-15	16,500 lbs	15 ft	101-143 in	173 in	12 ft.	177 in	7 in	81 in	131 in	945 lbs	125%	125%	
22000R-15	22,000 lbs	15 ft	97-139 in	169 in	12 ft.	177 in	7 in	81 in	127 in	1030 lbs	125%	125%	

(1) Excludes weight of the trolley

Contact Information

Phone: 888-679-5283

For Sales:

solutions@easilymovedequipment.com

For Parts:

parts@easilymovedequipment.com