

# X-TREME

# XR1245


MANUFACTURING

Capacity . . . . .	12,000 lbs
Max Lift Height . . . . .	45'
Forward Reach . . . . .	30' 4"
Frame Leveling L/R . . . . .	11°
Weight . . . . .	32,930 lbs
Engine . . . . .	Perkins 122 hp
Fuel Capacity . . . . .	.48 gal
Tires . . . . .	Foam Filled 15.5 x 25 E3
GPM . . . . .	.49
PSI . . . . .	3,500
Hydraulic Oil Cap . . . . .	.58 gal
Length to fork face . . . . .	22' 3"
Width . . . . .	.102"
Height . . . . .	.8' 1"
Wheel Base . . . . .	.124"
Ground Clearance . . . . .	16.5"
Turning Radius . . . . .	12' 2"
Warranty . . . . .	Xtreme 10-5-2

12,000lbs Cap  
45ft Lift Height  
122 hp



XR1245 LOAD CHART OUTRIGGERS DOWN-STANDARD CARRIAGE

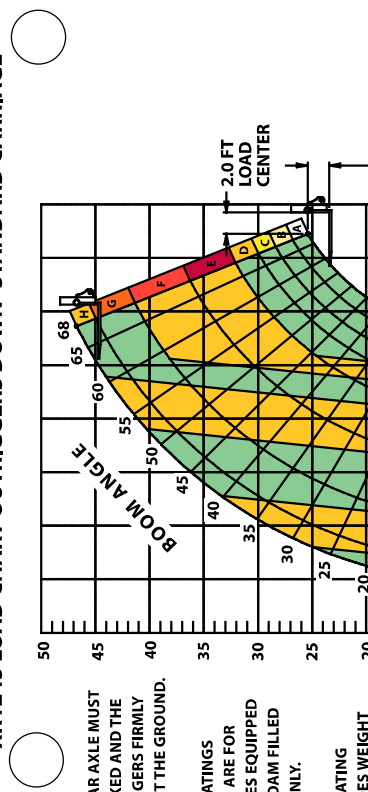

THE REAR AXLE MUST BE LOCKED AND THE OUTRIGGERS FIRMLY AGAINST THE GROUND.

LOAD RATINGS SHOWN ARE FOR VEHICLES EQUIPPED WITH FOAM FILLED TIRES ONLY.

LOAD RATING INCLUDES WEIGHT