



FEATURES

- 53-foot trailer opens to 184 feet with bumper
- Steel treadplate fenders available on the front and rear
- Add 24" long bunks to provide additional loading areas across the main beams: rolling and adjustable non-rolling versions available
- Rear-facing worklight at front, rated at 1200 lumens
- Red/green indicator lights on the toolbox front and rear signal if the power unit is on or off
- Air and electrical lines are well-protected inside turn table plates to keep them clean



SELF-STEERING SYSTEM


The axles automatically rotate to keep the trailer behind the truck at all times; the kingpin rotates and prompts the axles to track with it. An override remote allows drivers to take full control as needed. A beacon light alerts the driver and pilot car when the axles are turning (past 3 degrees).

CONVENIENT EXTENSION

XL's trusted extendable technology is the key to hassle-free extension; all trailer beams as well as the pullout bumper are on greasable rollers. Experience the smooth, quick, convenient extension of an XL with the Blade Mate. Extend from 53 feet to 184 feet with the pullout bumper.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

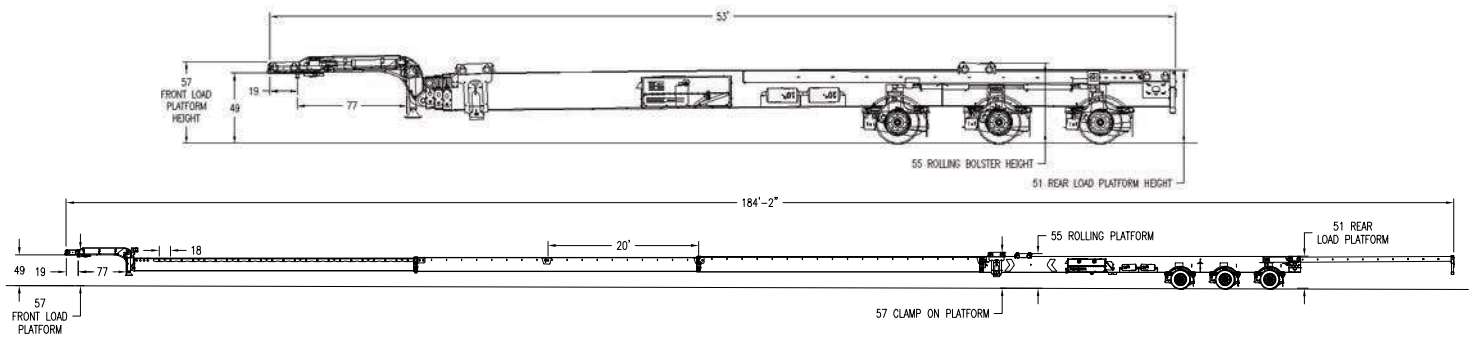

XL BLADEMATE SPECS

CAPACITY

capacity: 90,000 lb overall
weight: 33,350 lb without bunks
35,140 lb with 2 bunks

OVERALL LENGTH & WIDTH

overall length: 53' closed, opens to
184' 2" with pullout bumper
overall width: 102"

GOOSENECK

9' long
19" king pin setting
77" swing clearance
49" 5th wheel height
2 speed landing gear with handle
on curbside
bolt-on aluminum front fenders
2 d-rings on front
2 d-rings per side - 4 total
4 d-rings on rear of platform
20" loading platform on front
57" deck height on platform
1 pair of flag holders

MAIN DECK

T-1 flange, 80K web
13HP hydraulic power unit
51" loaded deck height
20" steel platform at rear with 4
d-rings and 6 chain slots
telescoping main frame,
4 total sections with stops on
18" centers after total
extension of 124"
2 pairs of flag holders
20' pullout, non-load bearing
bumper with stops on 24"
centers
1 pair d-rings in tail channel

MAIN DECK OPTIONS

24" long rolling bunk
24" long adjustable
non-rolling bunk
deck inserts

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

liquid filled air gauge
Air-weigh digital scale

AXLES

(3) 25,000 lb nominal
71" spacing
hub pilot, outboard drums
2SIM ABS
12 1/4" x 7 1/2" brakes
1 pair spring brakes
Tritronic hydraulic control kingpin
steering system with wireless
remote for over steering

AXLE OPTIONS

hubometer
TP axles (same inner &
outer bearings)
dust shields
cat eye systems
disc brakes

WHEELS & TIRES

6.75 x 17.5 steel rims
245/70R/17.5 tires

WHEEL & TIRE OPTIONS

customer specified tires
customer specified mud flaps
aluminum mill wheels
aluminum polished wheels
Michelin tires
PSI tire inflation system

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
3 tail light package with
aluminum cover
amber strobe as 3rd stop turn tail
rear facing work light on upper
deck
power on/off indicator
system alignment indicator

PAINT

black, IH red, CAT yellow or white
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
3 year paint

AVAILABLE MODELS

XL 90 BM

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852